
















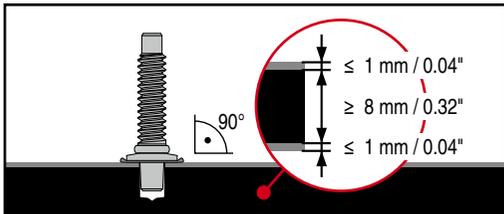


2488363-2026.02.11

CE
21
Hilti AG LI-9494 Schaan
Hilti-DX-DoP-008
ETA-20/1042
EAD 333037-00-0602
0672
0672-CPR-0934
Threaded studs for connection of materials to structural steel


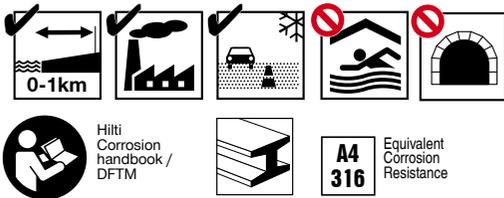


		Use with					
✓		SBT 6 SF BT 22-A SF BT 18-A	DX 351-BT	X-BT 1/4" - 20Nm/ 14,8 ft lb	X-NSD 1/4" - 10 mm X-NSD 1/4" - 7/16"	X-IG BT M6	X-IG BT W6

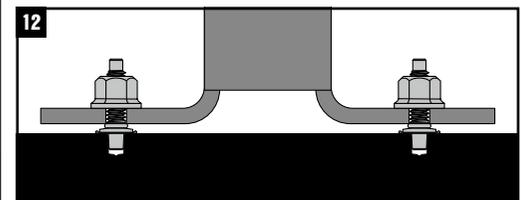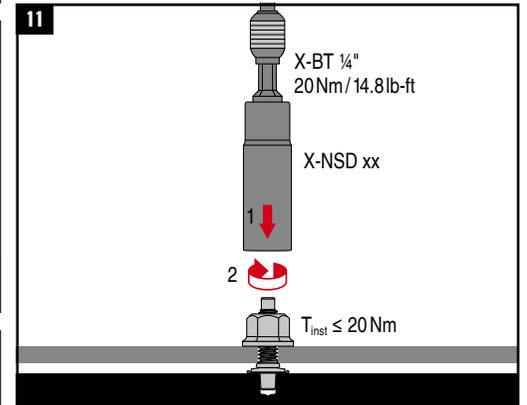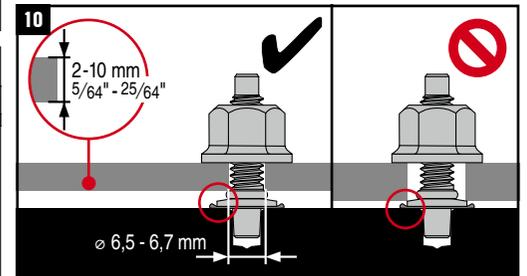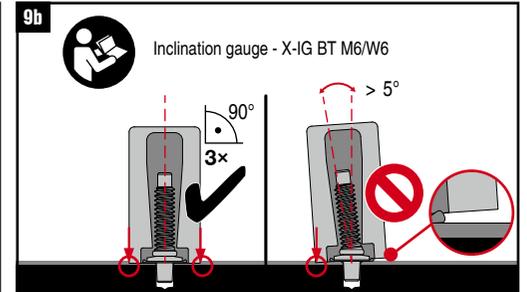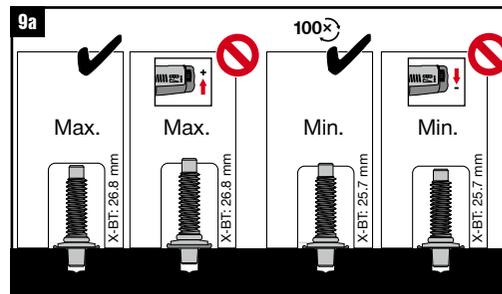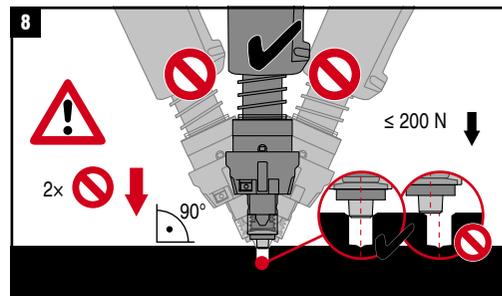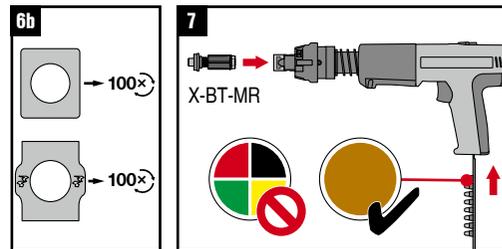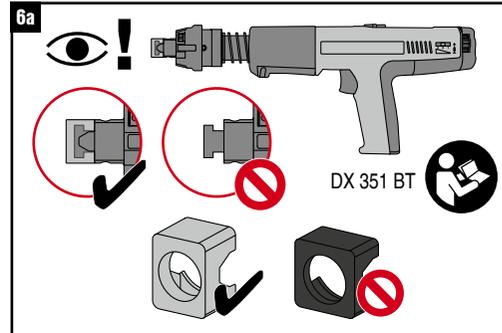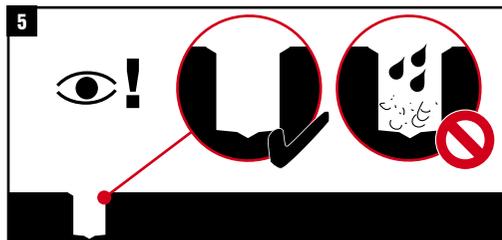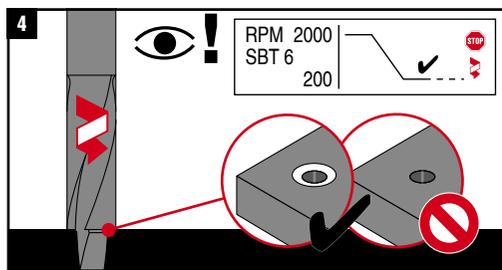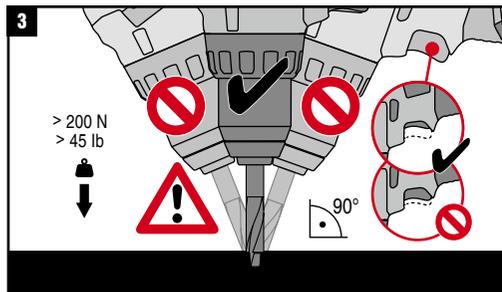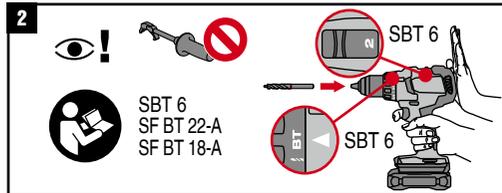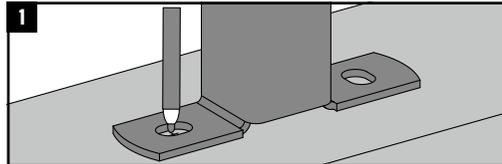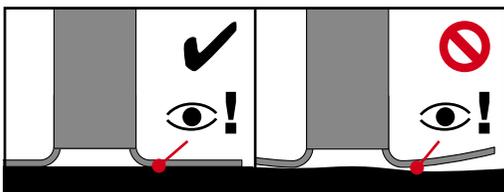

2488363-2026.02.11

CE
21
Hilti AG LI-9494 Schaan
Hilti-DX-DoP-008
ETA-20/1042
EAD 333037-00-0602
0672
0672-CPR-0934
Threaded studs for connection of materials to structural steel

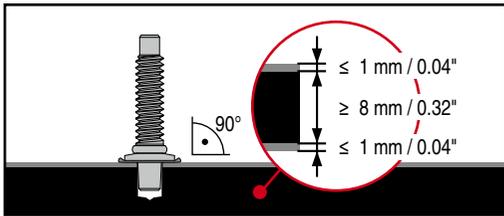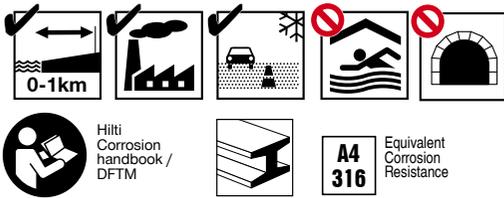

		Use with				
X-BT-MR M6/10 SN 8 V3	✓	SBT 6	BX 3-BT	X-BT 1/4" - 20Nm/ 14,8 ft lb	X-NSD 1/4" - 10 mm	X-IG BT M6
X-BT-MR W6/10 SN 8 V3		SF BT 22-A	BX 4-BT	X-NSD 1/4" - 7/16"	X-IG BT W6	

