




2488365-2026.02.11















CE
21
Hilti AG LI-9494 Schaan
Hilti-DX-DoP-008
ETA-20/1042
EAD 333037-00-0602
0672
0672-CPR-0934
Threaded studs for connection of materials to structural steel



A4 316
Equivalent Corrosion Resistance


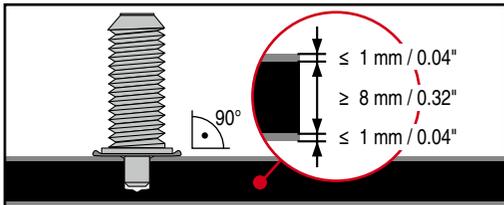


Use with					
X-BT-MR M10/15 SN 8 V3	SBT 6	DX 351-BT	X-BT 1/4" 20Nm/ 14,8 ft lb	S-NS 15 C 95/3 1/4"	X-IG BT M10
X-BT-MR W10/15 SN 8 V3	SF BT 22-A SF BT 18-A			S-NS 9/16" C 95/3 3/4"	X-IG BT W10

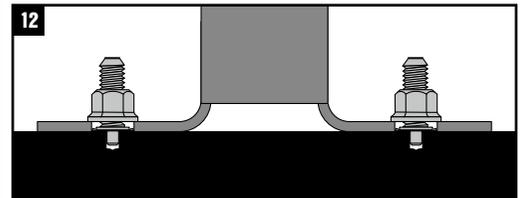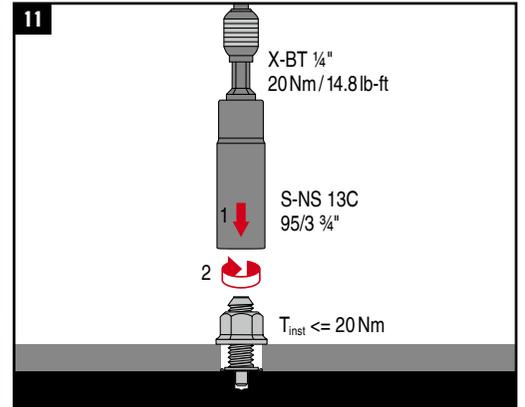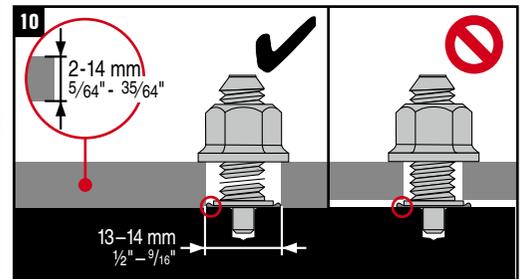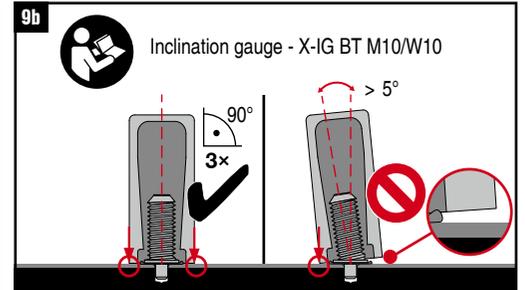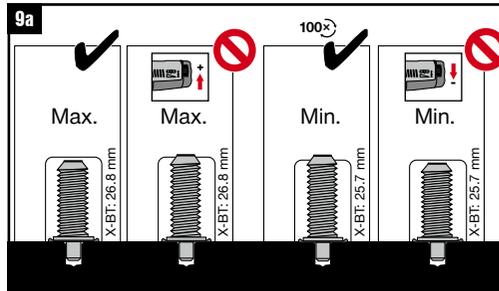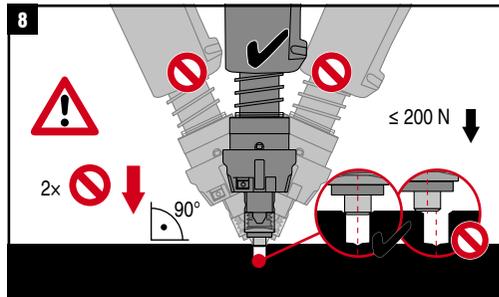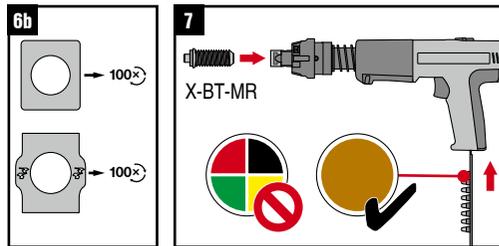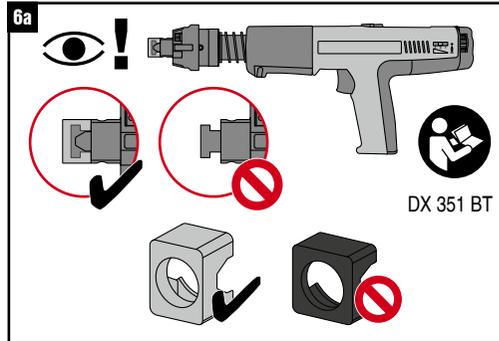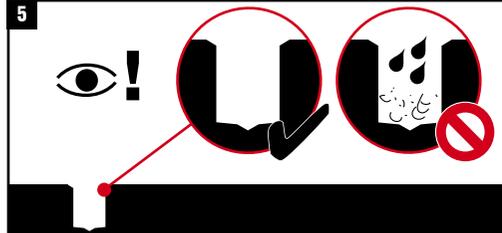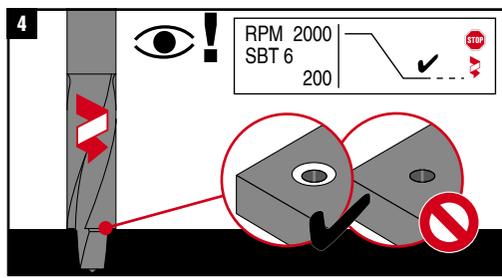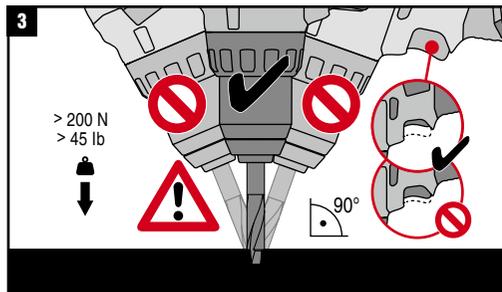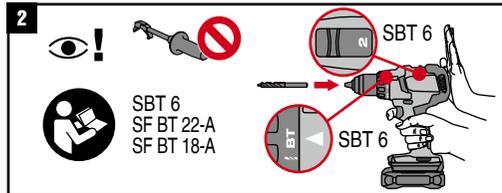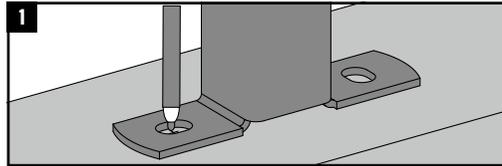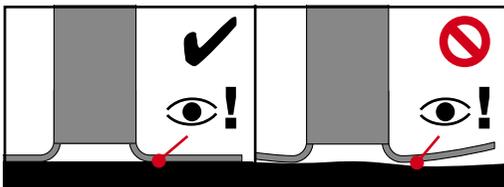

2488365-2026.02.11

CE
21
Hilti AG LI-9494 Schaan
Hilti-DX-DoP-008
ETA-20/1042
EAD 333037-00-0602
0672
0672-CPR-0934
Threaded studs for connection of materials to structural steel

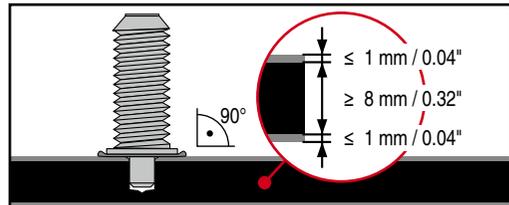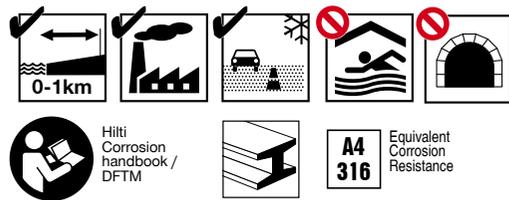

		Use with				
X-BT-MR M10/15 SN 8 V3	✓					

