



# X-BT-ER M8, M10/W10 SN 8 V3



2488367-2026.02.11

Equivalent Corrosion Resistance  
 Hilti Corrosion handbook / DFTM

X-BT-ER M8/7 SN 8 V3	X-BT-ER M10/7 SN 8 V3	X-BT-ER W10/7 SN 8 V3

Use with

--	--	--	--

**1**

SBT 6  
SF BT 22-A  
SF BT 18-A

**2**

$> 200\text{ N}$   
 $> 45\text{ lb}$

**3**

RPM 2000  
SBT 6  
200

$\leq 1\text{ mm} / 0.04"$   
 $\geq 8\text{ mm} / 0.32"$   
 $\leq 1\text{ mm} / 0.04"$

$\leq 7\text{ mm}$

**4**

**5**

DX 351 BT

**6**

X-BT-ER

**7**

$\leq 200\text{ N}$   
2x  
90°

**8a**

Max. ✓  
Max. ✗  
Min. ✓  
Min. ✗

X-BT: 26.8 mm  
X-BT: 26.8 mm  
X-BT: 26.7 mm  
X-BT: 26.7 mm

**8b**

Inclination gauge - X-IG BT M8/M10/W10

90°  
3x  
 $> 5^\circ$

**9a**

$\geq 2\text{ mm}$

**9b**

5/64"

**10**

min. 8 Nm  
max. 20 Nm



**11**

20 mm



# X-BT-ER M8, M10/W10 SN 8 V3

2488367-2026.02.11

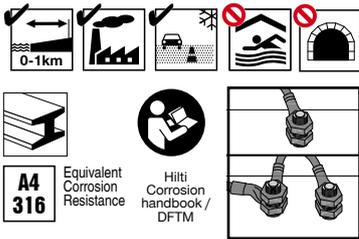

Use with

SBT 6 SF BT 22-A SF BT 18-A	BX 3-BT BX 4-BT	X-BT 1/4\" 20Nm/14,8 ft lb	X-IG BT M8 X-IG BT M10 X-IG BT W10

